HYSTER

STRONG PARTNERS.
TOUGH TRUCKS.™

REACH TRUCK

R1.0E, R1.2E, R1.4E

1 000 – 1 400 KG

R1.0E, R1.2E, R1.4E

				HYSTER		HYSTER	
DISTINGUISHING MARKS	1.1	Manufacturer (abbreviation)		HYSTER		HYSTER	
	1.2	Manufacturer's type designition		R1.0E		R1.2E	
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Electric (battery)		Electric (battery)	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated		Seated	
	1.5	Rated capacity/Rated load	Q (t)	1.0		1.2	
	1.6	Load centre distance	c (mm)	600		600	
	1.8	Load distance, centre of drive axle to forks	x (mm)	181		181	
	1.9	Wheelbase	y (mm)	1300		1300	
WEIGHTS	2.1	Service weight	kg	2845		2845	
	2.3	Axle loading, unladen front/rear [5]	kg	1622	1223	1622	1223
	2.4	Axle loading fork advanced, laden front/rear		810	3035	695	3350
	2.5	Axle loading fork retracted, laden front/rear	kg	1288	2557	1222	2823
TYRES / CHASSIS	3.1	Tyres: polyurethane, topthane, vulkollan, front/rear		Vulkollan/Vulkollan		Vulkollan/Vulkollan	
	3.2	Tyre size, front	ø (mm x mm)	305 x 140		305 x 140	
	3.3	Tyre size, rear	ø (mm x mm)	220 x 85		220 x 85	
	3.5	Wheels, number front/rear (x = driven wheels)		1x	2	1x	2
	3.7	Tread, rear	b_{11} (mm)	990		990	
DIMENSIONS	4.1	Tilt of mast/fork carriage forward/backward	h_1 (mm)	1° / 3°		1° / 3°	
	4.2	Height of mast, lowered		2191		2191	
	4.3	Free lift	h_2 (mm)	1706		1706	
	4.4	Lift	h_3 (mm)	5000		5000	
	4.5	Height, mast extended [1]	h_4 (mm)	5560		5560	
	4.7	Height of overhead guard (cabin) [2]	h_6 (mm)	2175		2175	
	4.8	Seat height relating to SIP	h_7 (mm)	1082		1082	
	4.10	Height of wheel arms	h_8 (mm)	235		235	
	4.19	Overall length	l_1 (mm)	2500		2500	
	4.20	Length to face of forks	l_2 (mm)	1350		1350	
	4.21	Overall width [3]	b_1 (mm)	1125		1125	
	4.22	Fork dimensions DIN ISO 2331	s/e/l (mm)	40 / 80 / 1150		40 / 80 / 1150	
	4.23	Fork carriage ISO 2328, class/type A, B		2A		2A	
	4.24	Fork-carriage width	b_3 (mm)	700		700	
	4.25	Distance between fork-arms MIN/MAX [7]	b_5 (mm)	220	640	220	640
	4.26	Distance between wheel arms/loading surfaces		900		900	
	4.28	Reach distance		341		341	
	4.31	Ground clearance, laden, below mast	m_1 (mm)	75		75	
	4.32	Ground clearance, centre of wheelbase	m_2 (mm)	75 [8]		75 [8]	
	4.34.1	Aisle width for pallets 1000mm x 1200mm crossways	A_{st} (mm)	2770		2770	
	4.34.2	Aisle width for pallets 800mm x 1200mm lengthwise	A_{st} (mm)	2850		2850	
	4.35	Turning radius	W_a (mm)	1555		1555	
	4.37	Length across wheel arms	l 7 (mm)	1660		1660	
	4.42	Step height (from ground to running board)	mm	550		550	
	4.43	Step height (between intermediate steps between running board and floor)	mm	371		371	
PERFORMANCE DATA	5.1	Travel speed, laden/unladen	km/h	11.0	11.0	11.0	11.0
	5.1.1	Travel speed, laden/unladen, backwards	km/h	11.0	11.0	11.0	11.0
	5.2	Lift speed, laden/unladen	m/s	0.45	0.70	0.40	0.70
	5.3	Lowering speed, laden/unladen	m/s	0.55	0.45	0.55	0.45
	5.4	Reaching speed, laden/unladen	m/s	0.15	0.15	0.15	0.15
	5.7	Gradeability, laden/unladen	%	9.0	12.7	8.5	12.7
	5.8	Max. gradeability laden/unladen	%	14.6	20.2	13.8	20.2
	5.9	Acceleration time laden/unladen	s	5.5	4.9	13.8	20.2
	5.10	Service brake		Electric		Electric	
ELECTRIC ENGINE	6.1	Drive motor S2 60 minute rating	kW	5.4		5.4	
	6.2	Lift motor, S3 15% rating	kW	9.9		9.9	
	6.3	Battery according to DIN 43531/35/36 A,B,C, no		B		B	
	6.4	Battery voltage/nominal capacity K5	(V)/(Ah)	48V	560Ah [6]	48V	560Ah [6]
	6.5	Battery weight [4]	kg	937		937	
	6.6	Energy consumption according to VDI cycle	kWh/h at Nr of cycles	2.8		3.3	
DRIVE/LIFT MECHANISM	8.1	Type of drive unit		AC-Controller		AC-Controller	
ADDITIONAL DATA	10.7	Sound pressure level at the driver's seat	dB (A)	69.55		69.55	

Specification data is based on VDI 2198

EQUIPMENT & WEIGHT: Weights (line 2.1) are based on the following specifications:
Complete truck with 3 stage FFL mast, 40 x 80 x 1150 mm forks, Vulkollan/Vulkollan drive and load wheels.

				HYSTER	
DISTINGUISHING MARKS	1.1	Manufacturer (abbreviation)			
	1.2	Manufacturer's type designition		R1.4E	
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Electric (battery)	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated	
	1.5	Rated capacity/Rated load	Q (t)	1.4	
	1.6	Load centre distance	c (mm)	600	
	1.8	Load distance, centre of drive axle to forks	x (mm)	371	
	1.9	Wheelbase	y (mm)	1400	
WEIGHTS	2.1	Service weight	kg	2948	
	2.3	Axle loading, unladen front/rear (5)	kg	1851	1097
	2.4	Axle loading fork advanced, laden front/rear		694	3654
	2.5	Axle loading fork retracted, laden front/rear	kg	1605	2743
TYRES / CHASSIS	3.1	Tyres: polyurethane, topthane, vulkollan, front/rear		Vulkollan/Vulkollan	
	3.2	Tyre size, front	ø (mm x mm)	305 x 140	
	3.3	Tyre size, rear	ø (mm x mm)	285 x 100	
	3.5	Wheels, number front/rear (x = driven wheels)		1x	2
	3.7	Tread, rear	b_{11} (mm)	1155	
DIMENSIONS	4.1	Tilt of mast/fork carriage forward/backward	h_1 (mm)	1° / 3°	
	4.2	Height of mast, lowered		2191	
	4.3	Free lift	h_2 (mm)	1706	
	4.4	Lift	h_3 (mm)	5000	
	4.5	Height, mast extended (1)	h_4 (mm)	5560	
	4.7	Height of overhead guard (cabin) (2)	h_6 (mm)	2175	
	4.8	Seat height relating to SIP	h_7 (mm)	1082	
	4.10	Height of wheel arms	h_8 (mm)	308	
	4.19	Overall length	l_1 (mm)	2411	
	4.20	Length to face of forks	l_2 (mm)	1261	
	4.21	Overall width (3)	b_1 (mm)	1265	
	4.22	Fork dimensions DIN ISO 2331	s/e/l (mm)	40 / 80 / 1150	
	4.23	Fork carriage ISO 2328, class/type A, B		2A	
	4.24	Fork-carriage width	b_3 (mm)	700	
	4.25	Distance between fork-arms MIN/MAX (7)	b_5 (mm)	220	640
	4.26	Distance between wheel arms/loading surfaces		900	
	4.28	Reach distance		560	
	4.31	Ground clearance, laden, below mast	m_1 (mm)	75	
	4.32	Ground clearance, centre of wheelbase	m_2 (mm)	75 (8)	
	4.34.1	Aisle width for pallets 1000mm x 1200mm crossways	A_{st} (mm)	2741	
	4.34.2	Aisle width for pallets 800mm x 1200mm lengthwise	A_{st} (mm)	2792	
	4.35	Turning radius	W_a (mm)	1672	
	4.37	Length across wheel arms	l 7 (mm)	1795	
	4.42	Step height (from ground to running board)	mm	550	
	4.43	Step height (between intermediate steps between running board and floor)	mm	371	
PERFORMANCE DATA	5.1	Travel speed, laden/unladen	km/h	11.0	11.0
	5.1.1	Travel speed, laden/unladen, backwards	km/h	11.0	11.0
	5.2	Lift speed, laden/unladen	m/s	0.35	0.70
	5.3	Lowering speed, laden/unladen	m/s	0.55	0.45
	5.4	Reaching speed, laden/unladen	m/s	0.15	0.15
	5.7	Gradeability, laden/unladen	%	7.6	11.9
	5.8	Max. gradeability laden/unladen	%	12.5	19.0
	5.9	Acceleration time laden/unladen	s	5.7	4.8
	5.10	Service brake		Electric	
ELECTRIC ENGINE	6.1	Drive motor S2 60 minute rating	kW	5.4	
	6.2	Lift motor, S3 15% rating	kW	9.9	
	6.3	Battery according to DIN 43531/35/36 A,B,C, no		C	
	6.4	Battery voltage/nominal capacity K5	(V)/(Ah)	48V	560Ah (6)
	6.5	Battery weight (4)	kg	939	
	6.6	Energy consumption according to VDI cycle	kWh/h at Nr of cycles	4.4	
DRIVE/LIFT MECHANISM	8.1	Type of drive unit		AC-Controller	
ADDITIONAL DATA	10.7	Sound pressure level at the driver's seat	dB (A)	69.55	

Specification data is based on VDI 2198

EQUIPMENT & WEIGHT: Weights (line 2.1) are based on the following specifications:
Complete truck with 3 stage FFL mast, 40 x 80 x 1150 mm forks, Vulkollan/Vulkollan drive and load wheels.

NOTE:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster Truck.

(1) With load backrest 1000 mm height, h 4 + 508 mm; with load backrest 1500 mm height, h 4 + 1008 mm

(2) With beacon h 6 + 120 mm. ; With OHG Grid Protector h6 + 20 mm ; With OHG Screen Protector h6 + 30 mm .

(3) With load wheels lateral covers: 1289 mm (R1.4E/MR14E).

(4) These values may vary of +/- 5%.

(5) Forks retracted.

(6) See "Batteries table".

(7) Side shift stroke is +/-75mm.

(8) With side rollers options: 10mm

MAST TABLES

(1) With load backrest 1000 mm height, h4 + 508 mm

(2) All weights are: mast structures (weldment, cylinders, chain, pulley) + carriage + oil.

EXCLUDED: forks, accessories

(3) With load backrest 700 mm width, 1000 mm height, weight + 18 kg; with load backrest 700 mm width, 1500 mm height, weight + 26 kg

BATTERIES TABLES

(1) These values may vary of +/- 5%.

(2) Forks retracted.

All weights (2.1 to 2.5) are with lowest mast and standard forks.

STANDARD EQUIPMENT AND OPTIONS

x Standard equipment
o Optional equipment
- Not available

NOTICE

Care must be exercised when handling elevated loads. When the carriage and/or load is elevated, truck stability is reduced. It is important that the mast tilt in either direction is kept to a minimum when loads are elevated.

Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice.

Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

CE Safety:
This truck conforms to the current EU requirements.

TRUCK DIMENSIONS

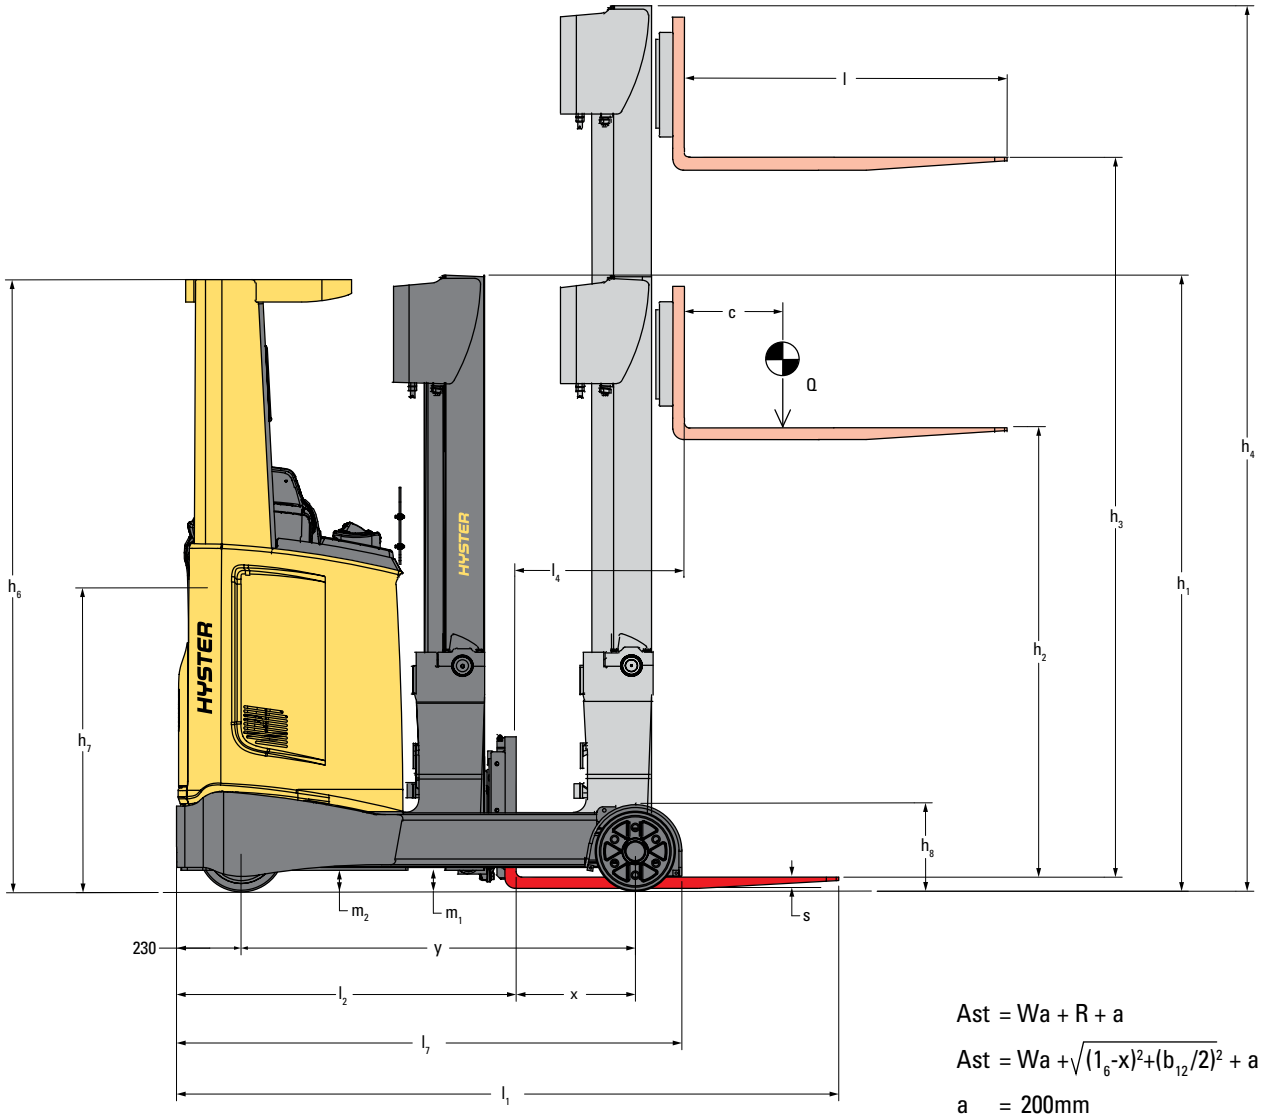

$$Ast = Wa + R + a$$

$$Ast = Wa + \sqrt{(1_6\text{-}x)^2+(b_{12}/2)^2} + a$$

$$a = 200mm$$

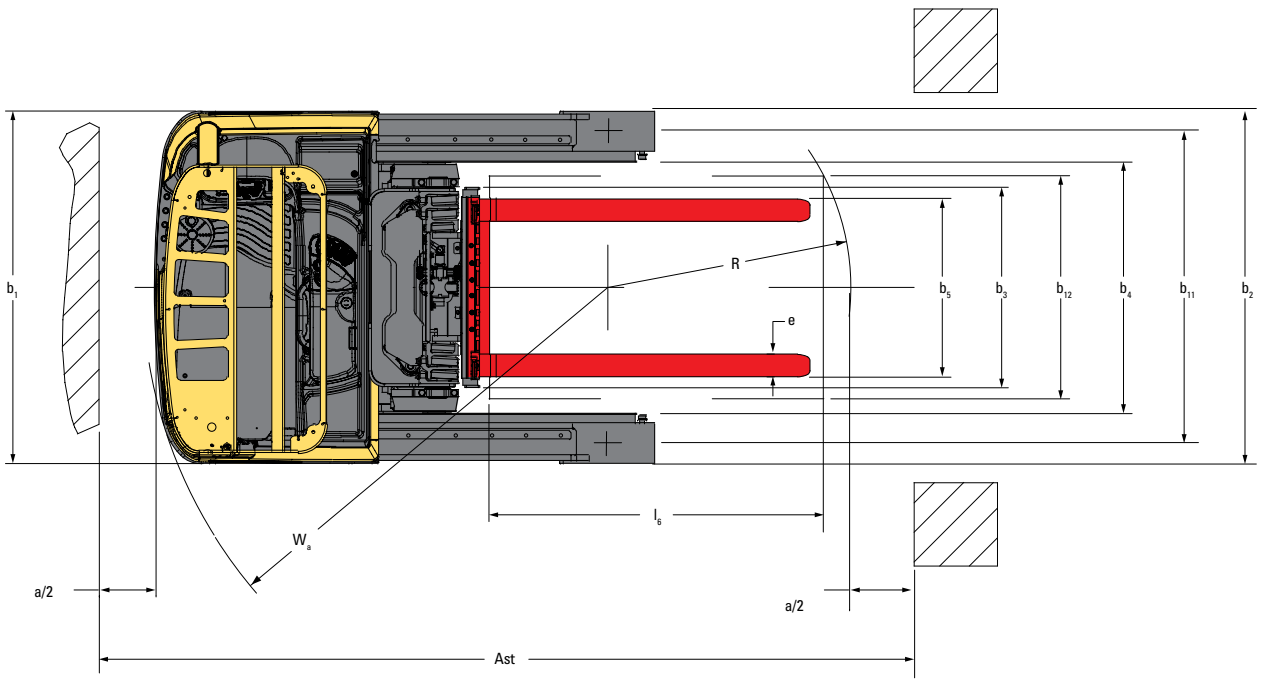

MAST TABLES

3 STAGE FFL

	Tilt α /β °	Lift h_3 (mm)	Free lift h_2 (mm)	Height, mast lowered h_1 (mm)	Height, mast extended h_4 [1] (mm)	Weight [2] [3] (kg)
R1.0E R1.2E R1.4E	1°/3°	5000	1706	2191	5560	629
	1°/3°	5250	1792	2277	5810	645
	1°/3°	5500	1878	2363	6060	662
	1°/3°	5750	1964	2449	6310	717
	1°/3°	6000	2050	2535	6560	736
	1°/3°	6250	2136	2621	6810	754
	0,5°/1°	6500	2222	2707	7060	772
	0,5°/1°	6750	2308	2793	7310	797
	0,5°/1°	7000	2394	2879	7560	815
	0,5°/1°	7250	2480	2965	7810	834
	0,5°/1°	7500	2566	3051	8060	852

TRUCK DIMENSIONS

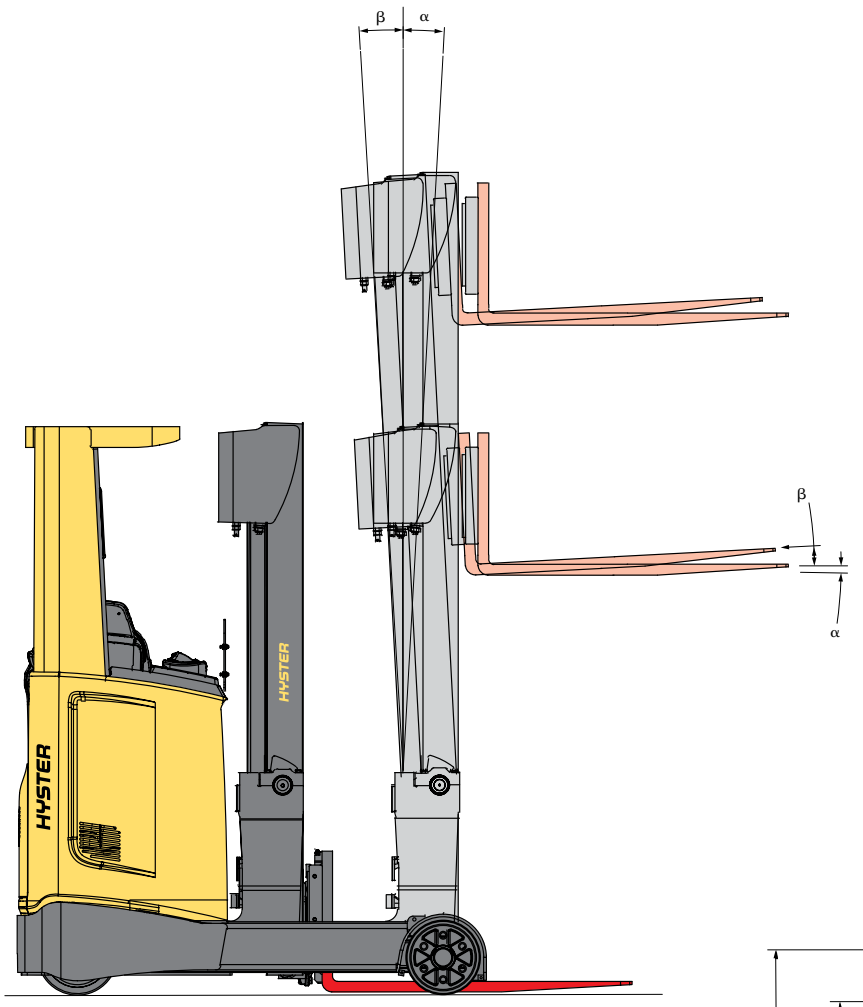

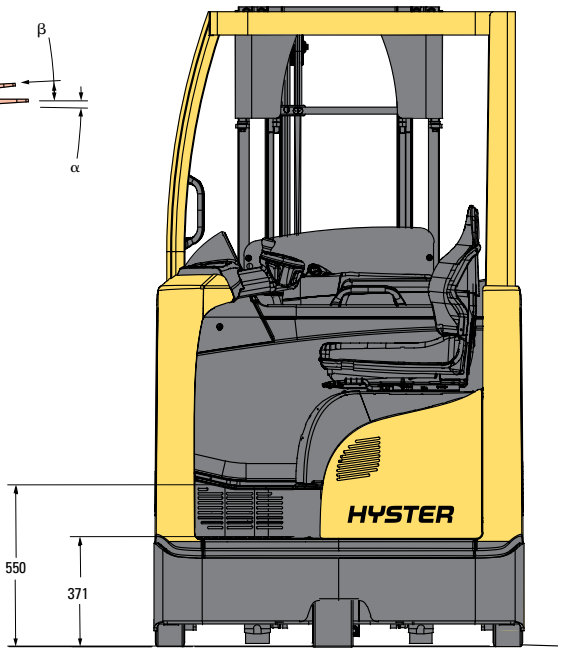

BATTERIES TABLES

R1.0E

	1.1	Manufacturer (abbreviation)		HYSTER	HYSTER	HYSTER	HYSTER	HYSTER	HYSTER
	1.2	Manufacturer's type designition		R1.0E	R1.0E	R1.0E	R1.0E	R1.0E	R1.4E
	1.8	Load distance, centre of drive axle to forks	x (mm)	361	361	271	271	181	181
	1.9	Wheelbase	y (mm)	1300	1300	1300	1300	1300	1300
	2.1	Service weight	kg	2389	2389	2602	2602	2845	2845
	2.3	Axle loading, unladen front/rear [5]	kg	1522 867	1522 867	1571 1031	1571 1031	1622 1223	1622 1223
	2.4	Axle loading fork advanced, laden front/rear		577 2812	577 2812	693 2909	693 2909	810 3035	810 3035
	2.5	Axle loading fork retracted, laden front/rear	kg	1327 2062	1327 2062	1306 2296	1306 2296	1288 2557	1288 2557
	4.19	Overall length	l_1 (mm)	2320	2320	2410	2410	2500	2500
	4.20	Length to face of forks	l_2 (mm)	1170	1170	1260	1260	1350	1350
	4.28	Reach distance		521	521	431	431	341	341
	4.34.1	Aisle width for pallets 1000mm x 1200mm crossways	A_{st} (mm)	2632	2632	2700	2700	2770	2770
	4.34.2	Aisle width for pallets 800mm x 1200mm lengthwise	A_{st} (mm)	2685	2685	2766	2766	2850	2850
	4.35	Turning radius	W_a (mm)	1555	1555	1555	1555	1555	1555
	6.3	Battery according to DIN 43531/35/36 A,B,C, no		B	B	B	B	B	B
	6.4	Battery voltage/nominal capacity K5	(V)/(Ah)	48V 280Ah	48V 310Ah	48V 420Ah	48V 465Ah	48V 560Ah	48V 620Ah
	6.5	Battery weight [4]	kg	541	543	746	750	937	945

R1.2E

	1.1	Manufacturer (abbreviation)		HYSTER	HYSTER	HYSTER	HYSTER	HYSTER	HYSTER
	1.2	Manufacturer's type designition		R1.2E	R1.2E	R1.2E	R1.2E	R1.2E	R1.2E
	1.8	Load distance, centre of drive axle to forks	x (mm)	361	361	271	271	181	181
	1.9	Wheelbase	y (mm)	1300	1300	1300	1300	1300	1300
	2.1	Service weight	kg	2389	2389	2602	2602	2845	2845
	2.3	Axle loading, unladen front/rear [5]	kg	1522 867	1522 867	1571 1031	1571 1031	1622 1223	1622 1223
	2.4	Axle loading fork advanced, laden front/rear		462 3127	462 3127	577 3225	577 3225	695 3350	695 3350
	2.5	Axle loading fork retracted, laden front/rear	kg	1288 2301	1288 2301	1254 2548	1254 2548	1222 2823	1222 2823
	4.19	Overall length	l_1 (mm)	2320	2320	2410	2410	2500	2500
	4.20	Length to face of forks	l_2 (mm)	1170	1170	1260	1260	1350	1350
	4.28	Reach distance		521	521	431	431	341	341
	4.34.1	Aisle width for pallets 1000mm x 1200mm crossways	A_{st} (mm)	2632	2632	2700	2700	2770	2770
	4.34.2	Aisle width for pallets 800mm x 1200mm lengthwise	A_{st} (mm)	2685	2685	2766	2766	2850	2850
	4.35	Turning radius	W_a (mm)	1555	1555	1555	1555	1555	1555
	6.3	Battery according to DIN 43531/35/36 A,B,C, no		B	B	B	B	B	B
	6.4	Battery voltage/nominal capacity K5	(V)/(Ah)	48V 280Ah	48V 310Ah	48V 420Ah	48V 465Ah	48V 560Ah	48V 620Ah
	6.5	Battery weight [4]	kg	541	543	746	750	937	945

R1.4E

	1.1	Manufacturer (abbreviation)		HYSTER	HYSTER	HYSTER	HYSTER
	1.2	Manufacturer's type designition		R1.4E	R1.4E	R1.4E	R1.4E
	1.8	Load distance, centre of drive axle to forks	x (mm)	443	443	371	371
	1.9	Wheelbase	y (mm)	1400	1400	1400	1400
	2.1	Service weight	kg	2716	2716	2948	2948
	2.3	Axle loading, unladen front/rear [5]	kg	1758 958	1758 958	1851 1097	1851 1097
	2.4	Axle loading fork advanced, laden front/rear		562 3554	562 3554	694 3654	694 3654
	2.5	Axle loading fork retracted, laden front/rear	kg	1568 2548	1568 2548	1605 2743	1605 2743
	4.19	Overall length	l_1 (mm)	2351	2351	2423	2423
	4.20	Length to face of forks	l_2 (mm)	1205	1205	1277	1277
	4.28	Reach distance		617	617	545	545
	4.34.1	Aisle width for pallets 1000mm x 1200mm crossways	A_{st} (mm)	2702	2702	2741	2741
	4.34.2	Aisle width for pallets 800mm x 1200mm lengthwise	A_{st} (mm)	2743	2743	2792	2792
	4.35	Turning radius	W_a (mm)	1672	1672	1672	1672
	6.3	Battery according to DIN 43531/35/36 A,B,C, no		C	C	C	C
	6.4	Battery voltage/nominal capacity K5	(V)/(Ah)	48V 420Ah	48V 465Ah	48V 560Ah	48V 620Ah
	6.5	Battery weight [4]	kg	750	750	939	950

STANDARD EQUIPMENT AND OPTIONS

CONSTRUCTION	R1.0E	R1.2E	R1.4E
Standard construction	x	x	x
b1 = 1125mm, b2 = 1125mm, b4 = 900mm frame	x	x	-
b1 = 1265mm, b2 = 1265mm, b4 = 900mm frame	-	-	x
Key switch start	x	x	x
Operator password start	o	o	o
PERFORMANCE	**R1.0E**	**R1.2E**	**R1.4E**
2175mm Overhead Guard	x	x	x
2175mm Drive In Racking Overhead Guard (Narrows at 1400mm)	o	o	o
2175mm Drive In Racking Overhead Guard (Narrows at 1700mm)	o	o	o
Polycarbonate (lexan) protection on overhead guard	x	x	x
Metal grid protection on overhead guard	x	x	x
Operator shield transparent (Lexan)	x	x	x
Standard display	x	x	x
TouchPoint™ mini levers mounted on adjustable length armrest	x	x	x
4 function hydraulics	x	x	x

STANDARD EQUIPMENT AND OPTIONS

PERFORMANCE (CONTINUED)	R1.0E	R1.2E	R1.4E
Joystick mounted on adjustable length armrest	o	o	o
Simultaneous hydraulic operation for lift and reach	x	x	x
Rocker switch directional control	x	x	x
Full suspension seat	x	x	x
Cloth seat cover	x	x	x
SKAI seat cover	o	o	o
Low backrest seat	x	x	x
Seat head rest	o	o	o
Seat heating	o	o	o
Antistatic seat (cloth version only)	o	o	o
180° steering	o	o	o
360° steering	x	x	x
Driver select steering mode 180 / 360° (push button)	o	o	o
VISIBILITY	**R1.0E**	**R1.2E**	**R1.4E**
Panoramic mirror	o	o	o
Amber strobe light	o	o	o
One front LED work light	o	o	o
2 rear LED work lights	o	o	o
DRIVE	**R1.0E**	**R1.2E**	**R1.4E**
Travel speed 11 km/h	x	x	x
305 x 140 mm vulkollan drive wheel	x	x	x
305 x 140 mm conductive drive wheel	o	o	o
305 x 140 mm wet grip drive wheel	o	o	o
220 x 85 mm vulkollan load wheels	x	x	-
220 x 85 mm conductive load wheels	o	o	-
220 x 85 mm wet grip load wheels	o	o	-
285 x 100 mm vulkollan load wheels	-	-	x
285 x 100 mm conductive load wheels	-	-	o
285 x 100 mm wet grip load wheels	-	-	o
Creep speed button	x	x	x
LIFT	**R1.0E**	**R1.2E**	**R1.4E**
3 stage mast	x	x	x
700 mm FEM 2A carriage	x	x	x
Various sizes forks	o	o	o
Without load backrest	x	x	x
1000 mm high load backrest	o	o	o
HANDLING	**R1.0E**	**R1.2E**	**R1.4E**
Universal s upport bar	x	x	x
Beverage holder and document tray	x	x	x
A4 clipboard	x	x	x
Stretch film roll holder	x	x	x
Side load wheel protection	-	-	o
24V DC/DC Converter	o	o	o
24-12V DC Converter	o	o	o
Audible forward alarm (forks trailing)	o	o	o
Audible reverse alarm (forks leading)	o	o	o
Audible forward and reverse alarm	o	o	o
Hyster Tracker wireless asset management - Access	o	o	o
Hyster Tracker wireless asset management - Monitoring	o	o	o
Hyster Tracker wireless asset management - Verification	o	o	o
BATTERIES	**R1.0E**	**R1.2E**	**R1.4E**
1035 x 263 x 784 mm battery compartment (for 280/310 Ah DIN B Battery)	x	x	-
1035 x 353 x 784mm battery compartment (for 420/465 Ah DIN B Battery)	o	o	-
1035 x 443 x 784mm battery compartment (for 560/620 Ah DIN B Battery)	o	o	-
1223 x 283 x 784mm battery compartment (for 420/465 Ah DIN C Battery)	-	-	x
1223 x 355 x 784mm battery compartment (for 560/620 Ah DIN C Battery)	-	-	o
Vertical battery extraction	x	x	x
Side battery extraction	o	o	o
Twin battery change station	o	o	o
Extension cable	o	o	o
APPEARANCE	**R1.0E**	**R1.2E**	**R1.4E**
Hyster yellow paint base truck	x	x	x
Special paint base truck	o	o	o
SUPPLEMENTAL	**R1.0E**	**R1.2E**	**R1.4E**
Literature package	x	x	x
CE certification	x	x	x
Warranty: 24 Months / 4,000 Hours Parts manufacturer's warranty	x	x	x
Warranty: 36 Months / 6,000 Hours Parts manufacturer's warranty	o	o	o

Please refer to Price List for full options configuration
Other options available through Special Products Engineering Department (SPED).
Contact Hyster for details.

STRONG PARTNERS. TOUGH TRUCKS.™
FOR DEMANDING OPERATIONS, EVERYWHERE.

Hyster supplies a complete range of warehouse equipment, IC and electric counterbalanced trucks, container handlers and reach stackers. Hyster is committed to being much more than a lift truck supplier.

Our aim is to offer a complete partnership capable of responding to the full spectrum of material handling issues: Whether you need professional consultancy on your fleet management, fully qualified service support, or reliable parts supply, you can depend on Hyster.

Our network of highly trained dealers provides expert, responsive local support. They can offer cost-effective finance packages and introduce effectively managed maintenance programmes to ensure that you get the best possible value. Our business is dealing with your material handling needs so you can focus on the success of your business today and in the future.

HYSTER EUROPE
Centennial House, Frimley Business Park, Frimley, Surrey, GU16 7SG, England.
Tel: +44 (0) 1276 538500, Fax: +44 (0) 1276 538559

www.hyster.eu **infoeurope@hyster.com** **/HysterEurope** **@HysterEurope** **/HysterEurope**

HYSTER-YALE UK LIMITED trading as Hyster Europe. Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey GU16 7SG, United Kingdom.
Registered in England and Wales. Company Registration Number: 02636775.
HYSTER, and FORTENS are registered trademarks in the European Union and certain other jurisdictions.
MONOTROL® is a registered trademark, and DURAMATCH and are trademarks in the United States and in certain other jurisdictions.
Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment.

Printed in EU. Part number: 3991266 Rev.00-07/18-TLC